



NA series

Pneumatic Swing Clamping Cylinder

管接式: Line Type

最大使用壓力 Max.10kg/cm²

氣路板式: Manifold Type

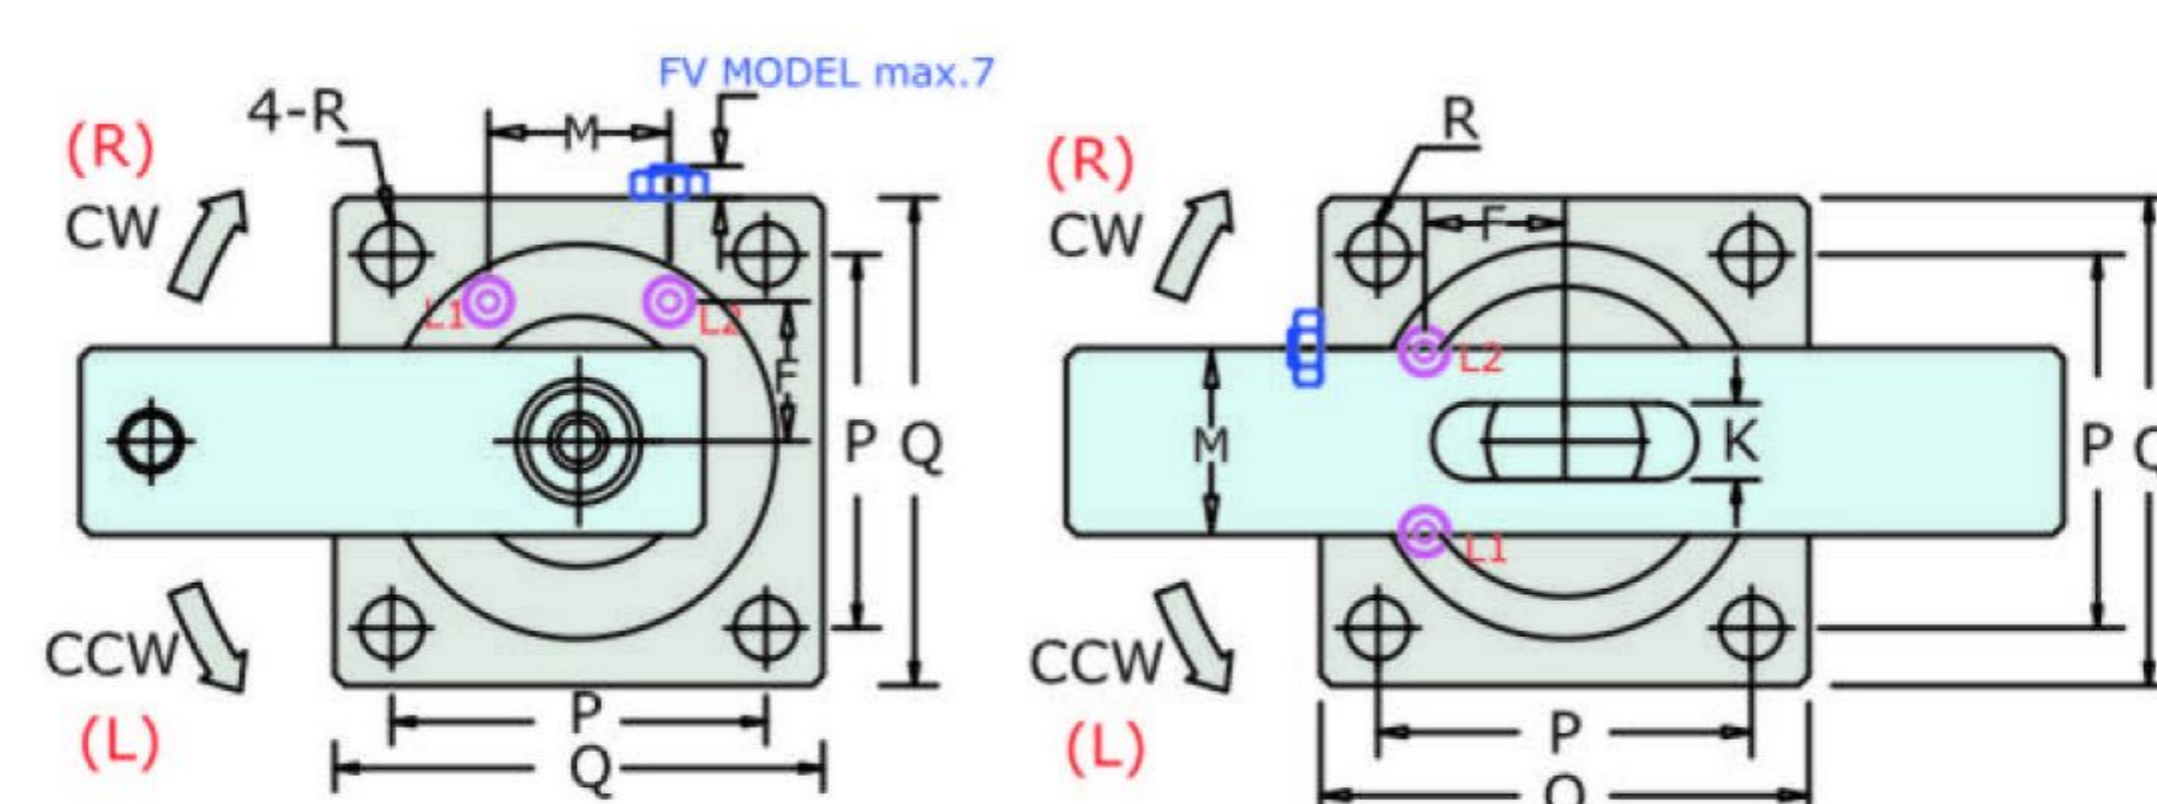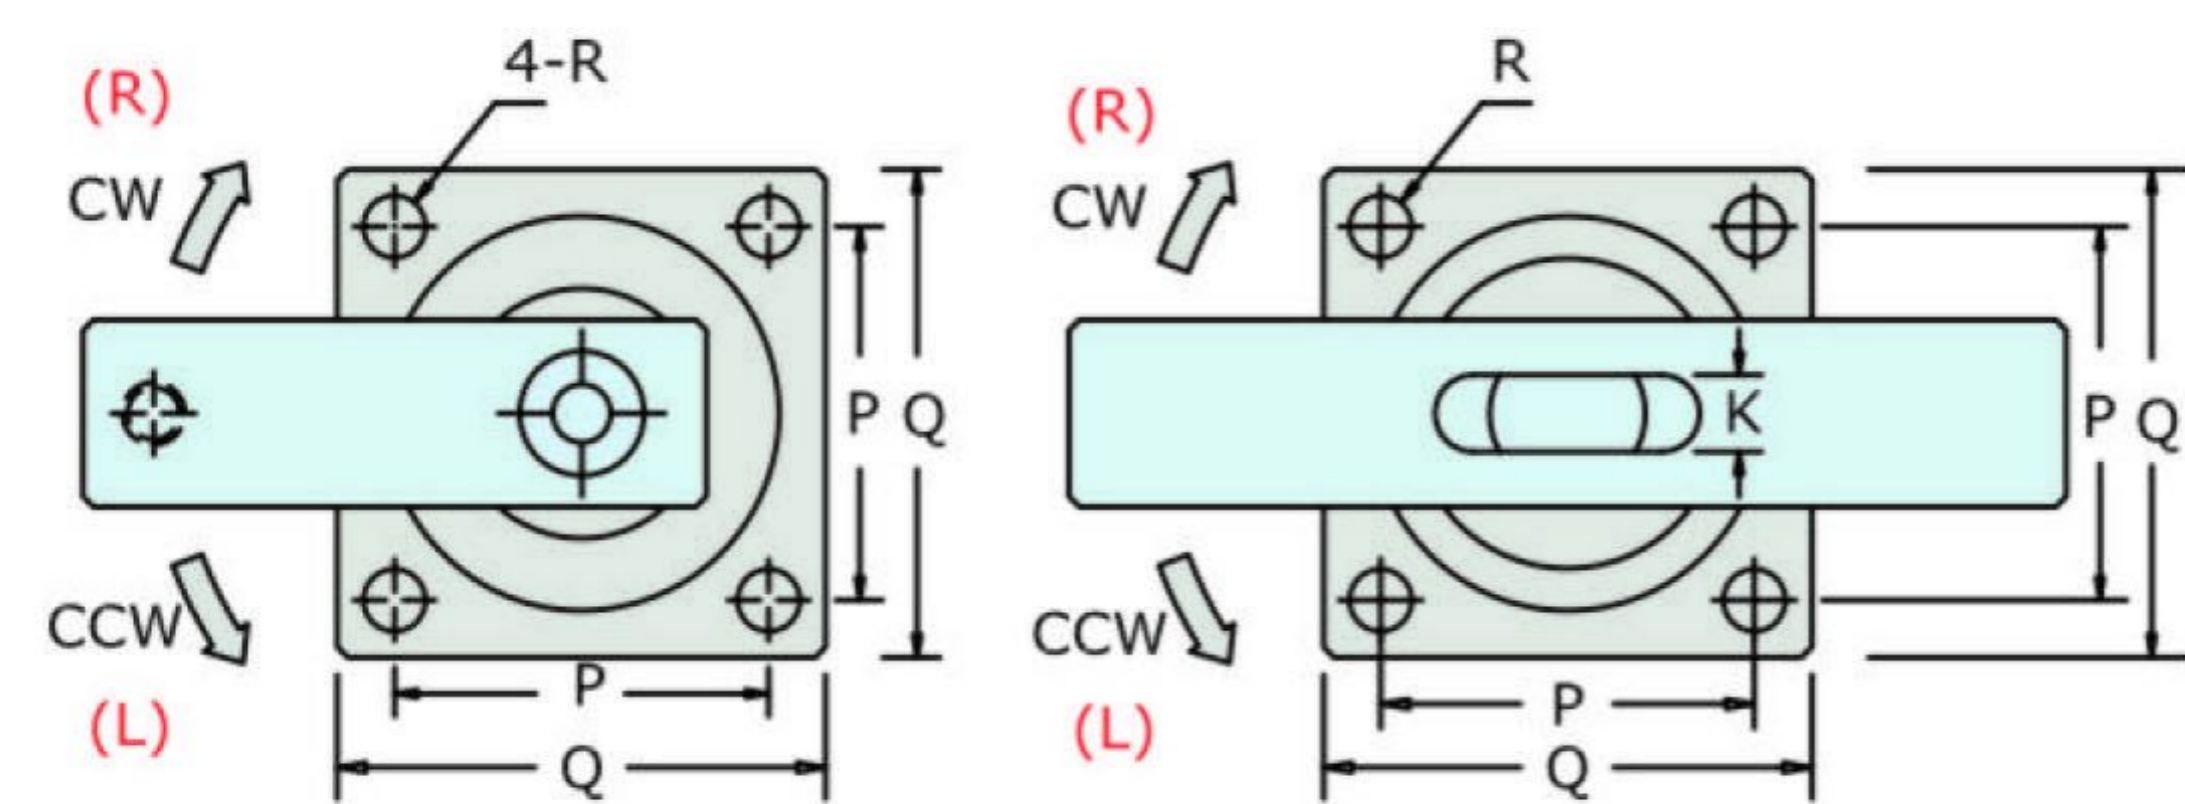

NAS

NASD

NAS

NASD

| 四方底座型 flang type | NAS-25 | NAS-32 NASD-32 | NAS-40 NASD-40 | NAS-50 NASD-50 | NAS-63 NASD-63 |
|---|-----------------------|-------------------|-------------------|-------------------|-------------------|
| 最大使用壓力 max. pressure | 10kg/cm ² | | | | |
| 一般使用壓力 normal pressure | 4-6kg/cm ² | | | | |
| 缸體運行方式 acting type | 複動 double acting | | | | |
| 轉角度數 swivel angle | 90°(0°,45°,60°)±2° | | | | |
| 轉角行程 swivel stroke | 12 | 12 | 12 | 14 | 14 |
| 夾緊行程 clamping stroke | 14 | 14 | 15 | 15 | 15 |
| 活塞直徑 bore dia. | 25 | 32 | 40 | 50 | 63 |
| 活塞杆徑 piston rod dia. | 14 | 16 | 16 | 20 | 20 |
| 理論壓力(5kg/cm ²) clamping force | 16kg | 30kg | 50kg | 85kg | 140kg |
| A放鬆狀態 unclamp | 95.5 | 102.5 | 106 | 113 | 119 |
| B | 65.5 | 71 | 75 | 80 | 86 |
| C | 23 | 23 | 26 | 26 | 30 |
| D | □16 | □19 | □19 | □25.4 | □25.4 |
| D' | - | □19 | □19 | □22 | □22 |
| G | 30 | 50 | 50 | 70 | 70 |
| G' | - | 100 | 100 | 120 | 120 |
| H | 8 | 9 | 9 | 10 | 10 |
| K | - | 9 | 9 | 10 | 10 |
| 氣孔L1(夾緊 clamp) / L2(放鬆 unclamp) | M5x0.8 | 1/8PT | 1/8PT | 1/8PT | 1/8PT |
| 氣路板型 O-ring manifold | S3 | S4 | S4 | S4 | S4 |
| N | M6x1 | M8x1.25 | M8x1.25 | M10x1.5 | M10x1.5 |
| N' | - | ∅8 | ∅8 | ∅8 | ∅8 |
| P | 30 | 44 | 48 | 55 | 64 |
| Q | 40 | 54 | 58 | 68 | 80 |
| R | ∅4.5 | ∅6.5 | ∅6.5 | ∅8.5 | ∅8.5 |
| S | ∅35 | ∅50 | ∅55 | ∅65 | ∅75 |
| M | 18 | 22 | 26 | 30 | 40 |
| F | 12.5 | 17 | 19.5 | 24 | 29 |
| weight 重量 kg | 0.4 | 0.7 | 0.85 | 1.3 | 1.8 |

網址: www.fdzc.net 联系人: 程家雄 手机: 13601809714

unit 單位: mm

联系电话: 021-51872743

E-mail: chengff@sh163.net