



# Directional Control Valves ND 10

max. operating pressure 315 bar

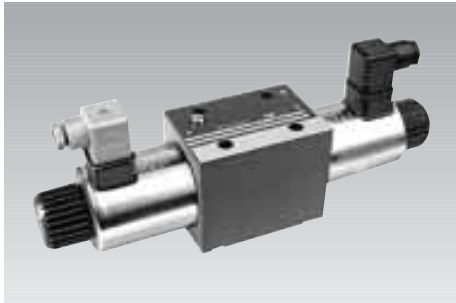

## 4/3 directional control valve with 2 solenoids

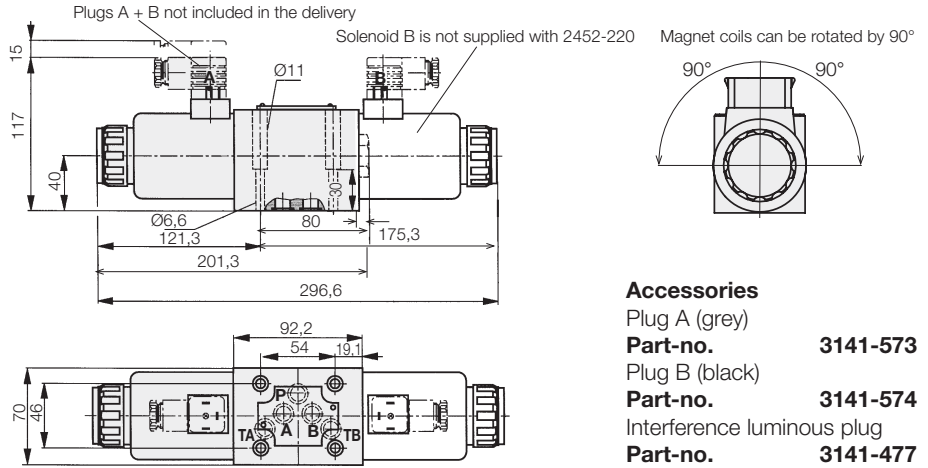

### General characteristics

Type Direct-acting spool valve  
Oper. specification DC solenoid, submersed in oil with emergency hand actuation  
Connecting dimensions Pinhole image as per DIN 24340 Form A, CETOP 4.2-4.3, ISO 4401  
Type of connection Subplate mounted  
Sealing 5 O-rings 12x2 NBR (are supplied)  
Type of mounting 4 socket head cap screws M 6x40 DIN 912-12.9  
Seating torque 15,5 Nm  
Mounting position any

### Hydraulic characteristics

Fluid Hydraulic oil as per DIN 51524  
Viscosity range (2,8 ... 500) x 10<sup>-6</sup> m<sup>2</sup>/s  
Temperature -30 ... +80 °C  
Operating pressure Ports A, B, P ... 315 bar  
Return pressure Port T ... 210 bar  
Leakage rate ... 30 cm<sup>3</sup>/min at 100 bar  
 $v = 36 \times 10^{-6}$  m<sup>2</sup>/s and t = 50 °C  
Flow rate ... 120 l/min  
Flow curve measured at  $v = 36 \times 10^{-6}$  m<sup>2</sup>/s and t = 50 °C

### Electric characteristics

Supply voltage 24 V DC  
Power input 35 W  
Duty cycle 100%  
Switching time on: 45-60 ms  
off: 20-30 ms  
Max. cycles ... 15000 Sch/h  
Ambient temperature -30 ... +50 °C  
Code class IP 65 as per DIN 40050  
Connection single plug connection as per DIN EN 175 301-803 and ISO 4400

Other voltages and actuations available on request.

### Accessories

Plug A (grey) Part-no. 3141-573  
Plug B (black) Part-no. 3141-574  
Interference luminous plug Part-no. 3141-477



Description	Symbol N°	Symbol	Weight [kg]	Part-no.
4/2 directional control valve	C		4,3	2552-220
4/3 directional control valve	E		5,9	2553-220
4/3 directional control valve	G		5,9	2555-220
4/3 directional control valve	J		5,9	2557-220
4/3 directional control valve	H		5,9	2558-220

### Δ p/Q-characteristic curves $v = 35 \text{ mm}^2/\text{s}$ for standard version

Symbol N°	Curve N°			
	PA BT	PB AT	PT	
C	3	5	3	4
E	1	4	1	4
G	3	7	3	6
J	1	3	1	3
H	1	7	1	6

### Switching limits for valves in standard version

The curves refer to applications with symmetrical flow of the valve. In the case of unsymmetrical flow (e.g. one passage is not used) reduces values can result. The values have been determined without switching time adjustment. With switching time adjustment these values are reduced by up to 20 % depending on the adjusting value.

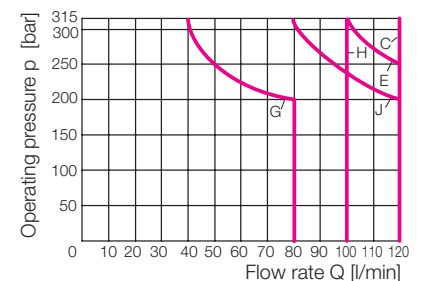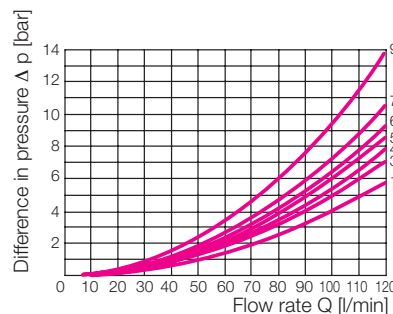

When determining pressure drop it should be noted that for double-acting cylinders with a piston surface ratio of e.g.  $\phi = 1.6$  a return flow rate 1.6 times the flow rate of the power unit must be used. Application limit: Function limit with warm solenoids and 10% undervoltage.


Note: The switching function of the valves depends on the filtering, due to the sticking effect. If the indicated, admissible flow values are to be used to the maximum, full flow filtering to 25 μm is recommended. Besides this, the values are only valid for standard use with 2 flow directions, e.g. from P to A with simultaneous return flow from B to T.

网址: [www.fdzc.net](http://www.fdzc.net) 联系人: 程家雄 手机: 13601809714

联系电话: 021-51872743


E-mail: [chengff@sh163.net](mailto:chengff@sh163.net)

**Single mounting plate G 1/2**  
**Part-no. 2530-100**  
 Connecting ports at the back

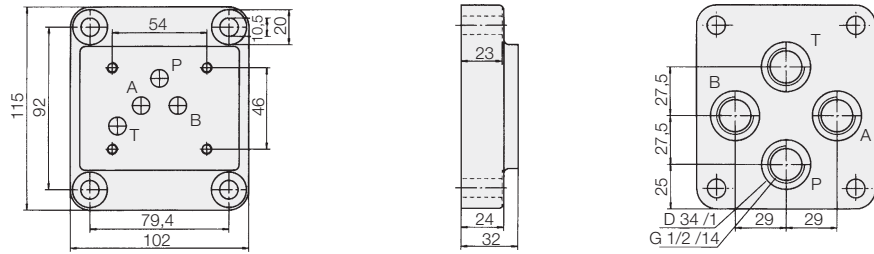

Series mounting plates	Part-no.
Connecting plate G 1/2	2530-710
Mounting plate for un-pressurised cycles	2530-601
Series mounting plate G 1/2	2530-402


Nuts M8, safety washers, plugs and O-rings are supplied with the connecting plates. Threaded bolts M8 x 1000 have to be ordered separately. **Part-no. 3300-343**  
 The length of the threaded studs results from the number of series mounting plates + 20 mm.

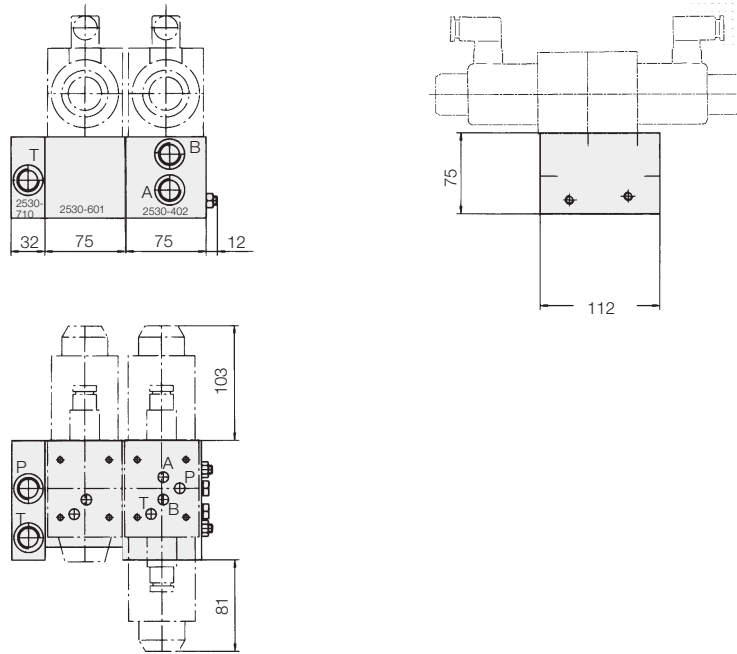


**Twin flow control non-return valve**  
**Part-no. 2957-402**

This valve regulates the flow rate in both port connections. It is flanged between directional control valve and mounting plate. For this longer fixing screws are necessary: 4 off M 6x90 DIN 912 12.9. **Part-no. 3301-202**

Through the separate O-ring plate, which always has to lie on the mounting plate, it is possible to control either the inflow or return flow by turning the valve round the x-x axis (see hydraulic circuit diagram).

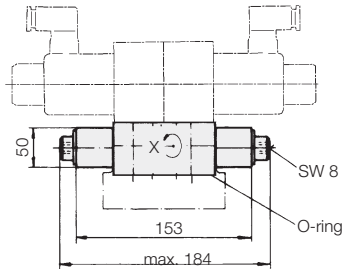


Presentation in the hydraulic circuit diagram

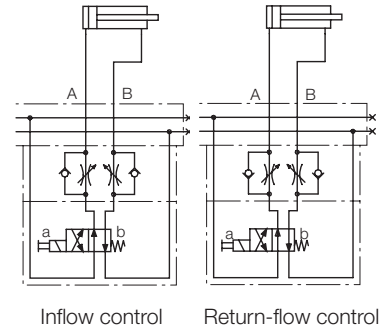


**Twin non-return valve**  
**Part-no. 2951-590**

This valve provides a leakage-free oil seal of one or two port connections. It is flanged between directional control valve and mounting plate. For this longer fixing screws are necessary: 4 socket head cap screws M 6x90 DIN 912-12.9. **Part-no. 3301-202**


The surface ratio is 1:2.78. A leakage-free oil seal of both connections is only guaranteed when 4/3 directional control valves are used 2553-320, 2555-320 (see hydraulic circuit diagram).

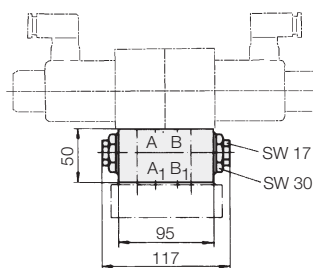

Presentation in the hydraulic circuit diagram

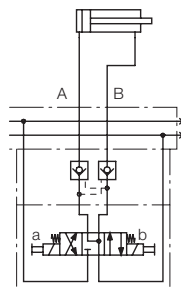

Presentation of twin non-return valve and twin flow control non-return valve

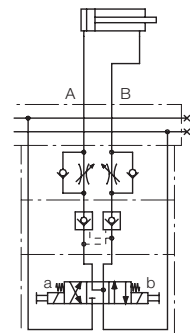

**Further accessories**

For building on of complete hydraulic controls to power units as per data sheet D 8.031, further interlinking elements are available. We would be pleased to submit a quotation tailored to your particular application.

For the installation of twin non-return valve and twin flow control non-return valve in combination with a spool valve longer fixing screws are necessary: M 6 x 140 DIN 912 -12.9.  
**Part-no. 3301-527**